



BACK

AS-20-06

22-18ga. #6 stud



30

BS-23-06

16-14ga. #6 stud



30

CS-28-08


12-10ga. #8 stud



20

D-350-14HT


8ga. 1/4 stud



15

B-171-HT

16-14ga. .187"
Female Disconnect



30

AS-33-10

22-18ga. #10 stud



30

BS-37-10


16-14ga. #10 stud



30

CS-28-10


12-10ga. #10 stud



20

E-357-38HT

6ga. 3/8 stud

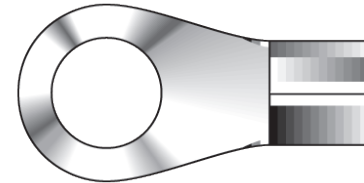

10

B-172-HT

16-14ga. .250"
Female Disconnect



30

AS-22-14


22-18ga. 1/4 stud



30

BS-25-14


16-14ga. 1/4 stud



30

CS-30-14

12-10ga. 1/4 stud



20

B-175-HT

16-14 Female Quick Disconnect Flag



30

MCT-1-HT

16-14ga. .250"
Male Disconnect



30

AS-45

22-18ga. splice



30

BS-31

16-14ga. splice



30

CS-46


12-10ga. splice



20

HI-1


105 °C 18-16ga. Wire Nut



15

HI-5

105 °C 16-14ga.
Wire Nut



15

FRONT

Supplied in a 20-Compartment Small Metal Box